

# ORWAK FLEX 5010-E

The ORWAK FLEX 5010-E is a small but tough baler, that requires little space but offers effective compaction. The unit is sturdy, reliable and easy to operate.



**SMALL  
FOOTPRINT**



**60 KG  
BALE WEIGHT  
CARDBOARD**

## ORWAK BENEFITS



### **MORE PRODUCTIVE USE OF TIME**

Less time spent on waste handling, more time for your core activities!

### **MORE SPACE & ORDER**

Our balers rapidly minimize the space the waste takes up, keeping aisles free and tidy.

### **LESS COSTS, MORE VALUE**

More compaction = less waste volume to transport. Fewer transports required results in lower transportation costs and reduced CO<sub>2</sub> emissions. Sorting at source yields a higher quality of waste material for recycling.

## WHY ORWAK FLEX?

- Versatile compaction for many different application areas
- Hygienic and safe compaction and disposal of mixed or hazardous waste
- Special solutions for special needs

 **ORWAK**  
PART OF **SULO** GROUP

# ORWAK FLEX 5010-E

Small but tough

## TOP LOADING

Feeding material into this top-loading baler is fast and convenient, and the compaction ratio is impressive thanks to high pressure on a small surface.

## VERSATILE

The design means that the compactor is versatile and can be used for baling waste products such as cardboard, paper, plastic and even thin wood packaging.

## COMPACT DESIGN

Thanks to its compact design, the baler fits where you need it to be and is easy to install in any location.

## BALE TROLLEY INCLUDED

Model 5010-E is always delivered with a bale trolley for effortless baling and smooth internal transportation of the bale.



## ORWAK FLEX5010-E IS OPTIMIZED FOR:

### PAPER

- Cardboard
- Shredded paper
- Paper sacks

### PLASTIC FOIL

- Shrink film
- Plastic bags

### OTHER METALS

- Metal straps

### OTHER PLASTICS

- Plastic straps


## DIMENSIONS & SPECIFICATIONS

### DIMENSIONS

| A       | B      | C       | D       | E       |
|---------|--------|---------|---------|---------|
| 2140 mm | 910 mm | 1110 mm | 1820 mm | 1295 mm |

### ENERGY CONSUMPTION

| STANDBY MODE | MAXIMUM OPERATION ONE HOUR |
|--------------|----------------------------|
| ---          | 660 W/H                    |

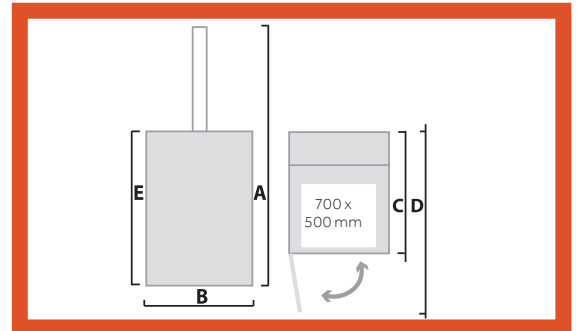

### TECHNICAL SPECIFICATIONS

| LOADING APERTURE               | CYCLE TIME | PRESS FORCE  | BALE SIZE  | BALE WEIGHT                                    | MACHINE WEIGHT | NOISE LEVEL | PROTECTION CLASS | OPERATING POWER                       |
|--------------------------------|------------|--------------|--|--|----------------|-------------|------------------|---------------------------------------|
| Width: 700 mm<br>Depth: 500 mm | 36 secs    | 3 ton, 30 kN | Width: 700 mm<br>Depth: 500 mm<br>Height: 700 mm | Cardboard: Up to 60 kg<br>Plastic: Up to 80 kg | 370 kg         | 70 db (A)   | IP 55            | Single Phase<br>230 V,<br>50 Hz, 10 A |

We reserve the right to make changes to specifications without prior notice. Bale/bag/bin weights are dependent upon material type.

## ORWAK AB

Svetsaregatan 4  
S-576 33 Sävsjö  
SWEDEN  
Tel: +46-(0)382-15700  
info@orwak.com

**ORWAK.COM**

**ORWAK**  
PART OF SULO GROUP